
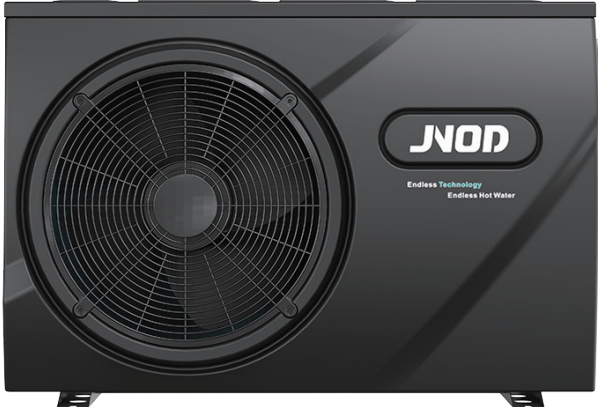


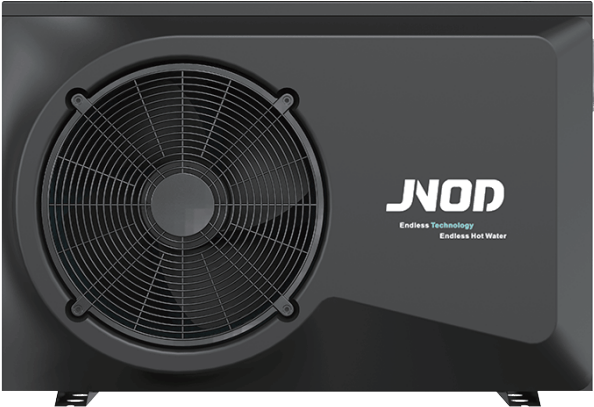

Model	J55SP32INVP	J75SP32INVP	J95SP32INVP	J115SP32INVP	J145SP32INVP	J175P32INVP
Ambient Temperature: (DB/WB) 27°C/24.3°C; Water Inlet/Outlet Temperature: 26°C/28°C						
Heating Capacity (kW)	1.1~3.9	1.3~5.4	1.5~7.9	3	3	3
Power Input(kW)	0.47	0.47	0.47	0.805	0.805	0.805
COP	3.83	3.83	3.83	3.73	3.73	3.73
Ambient Temperature: (DB/WB) 15°C/12°C; Water Inlet Temperature: 26°C						
Heating Capacity (kW)	1.1~3.9	1.3~5.4	1.5~7.9	2.21~8.23	2.96~11.14	3.44~13.35
Power Input(kW)	0.138~0.75	0.168~1.102	0.194~1.491	0.283~1.614	0.36~2.19	0.41~2.61
COP	7.97~5.2	7.74~4.9	7.73~5.3	7.81~5.1	8.3~5.1	8.3~5.1
General Info						
Max Power Input (kW)	1.31	1.61	1.75	2.3	3.2	3.9
Max Current (A)	5.95	7.32	7.95	10.5	14.5	17.9
Wifi Control	Yes	Yes	Yes	Yes	Yes	Yes
Power Supply	220V~240V/50Hz/60Hz					
Operating Air Temp.(°C)	-10~43					
Heating Temp. Range(°C)	15~40					
Cooling Temp. Range(°C)	20~35					
Refrigerant	R32					
Compressor Type	Rotary					
Compressor Brand	GMCC					
Gas Control	EEV					
4-Way Valve	Yes					
Fan Quantity	1					
Heat Exchanger	Titanium in PVC					
Casing Material	Plastic					
Water Pipe Connection (mm)	50					
Noise Level at 1m dB(A)	20~45	20~46	21~46	22~47	34~48	34~48
Water Flow (m³/h)	2.4	3.1	4.1	4.9	6.6	7.7
Water Pressure Drop (kPa)	15	17	18	15	30	31
Net Weight (kg)	33	37	39	44	47	52
Net Dimension (mm)	903*340*666			990*340*666		

Model	J210SP32INVP	J250SP32INVP	J210SP32INV3NP	J250SP32INV3NP	J280SP32INV3NP
Ambient Temperature: (DB/WB) 27°C/24.3°C; Water Inlet/Outlet Temperature: 26°C/28°C					
Heating Capacity (kW)	4.72~21.21	5.05~25.28	4.70-21.2	4.78-25.3	4.95-28.1
Power Input(kW)	0.29~3.26	0.31~3.89	0.33-3.59	0.33-4.36	0.35-5.1
COP	16.2~6.5	16.2~6.5	14.2-5.88	14.48-5.8	14-5.51
Ambient Temperature: (DB/WB) 15°C/12°C; Water Inlet Temperature: 26°C					
Heating Capacity (kW)	3.51- 14.21	3.81- 17.08	3.52-14.07	3.61-16.7	4.05-18.5
Power Input(kW)	0.43~2.78	0.48~3.35	0.460-2.865	0.476-3.394	0.537-3.737
COP	8.1~5.1	8~5.1	7.65-4.91	7.58-4.92	7.54-4.95
General Info					
Max Power Input (kW)	1.31	1.61	1.75	2.3	3.2
Max Current (A)	5.95	7.32	7.95	10.5	14.5
Wifi Control	Yes	Yes	Yes	Yes	Yes
Power Supply	220V~240V/50Hz/60Hz		380V~415V/3Ph/50Hz		
Operating Air Temp.(°C)	-10~43				
Heating Temp. Range(°C)	15~40				
Cooling Temp. Range(°C)	20~35				
Refrigerant	R32				
Compressor Type	Rotary				
Compressor Brand	GMCC				
Gas Control	EEV				
4-Way Valve	Yes				
Fan Quantity	1				
Heat Exchanger	Titanium in PVC				
Casing Material	Plastic				
Water Pipe Connection (mm)	50				
Noise Level at 1m dB(A)	35~50	35~52	35-52	35-55	36-55
Water Flow (m³/h)	9.1	10.8	9.1	10.8	12
Water Pressure Drop (kPa)	32	35	32	35	38
Net Weight (kg)	75	85	75	85	90
Net Dimension (mm)	1117*437*770				